




AIRSTARTHOSSES

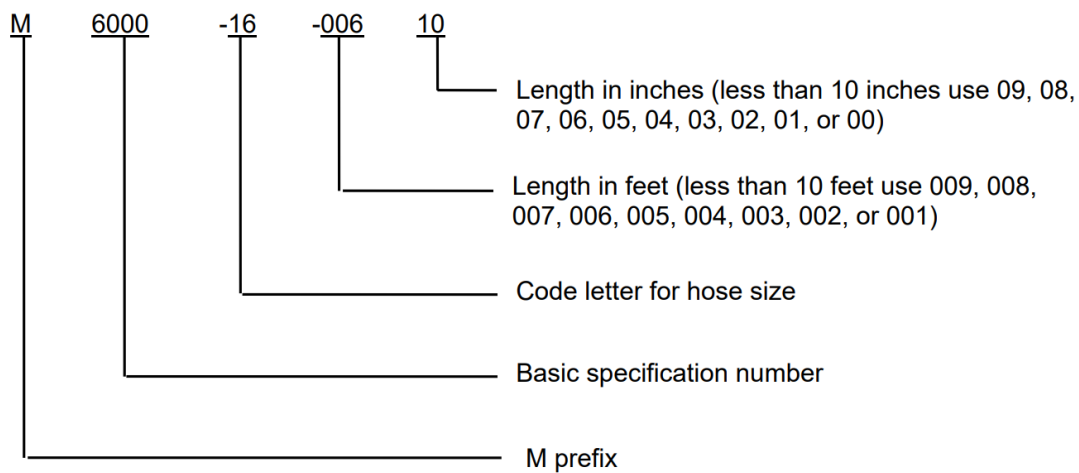

- The hose consist of a seamless compounded inner tube, ply or plies or reinforcement, and a protective outer coating
- The inner tube of the hose shall be manufactured from synthetic rubber compounded with the necessary ingredients to meet the requirements of this specification. Seamless and have a minimum thickness of .040 inch (1.02 mm).
- Reinforcement. The reinforcement consist of one or more plies with frictioning.
- The outer coating consist of polychloroprene rubber reinforced and compounded to meet the requirements of this specification.
- Ethylene glycol immersion

Manufactured to MIL-DTL 6000



**DELIVERIES FROM STOCK!**

**Feel free to ask for free sample**



**MIL DTL6000 D ® Hose**

**PARTNUMBERS**

HOSE PART	Configuration
MIL-DTL-6000D-1	MIL6000 SERIES 1" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-1-1/2	MIL6000 SERIES 1 1/2" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-1-1/4	MIL6000 SERIES 1 1/4" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-1-3/4	MIL6000 SERIES 1 3/4" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-1/2	MIL6000 SERIES 1/2" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-1/4	MIL6000 SERIES 1/4" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-2	MIL6000 SERIES 2" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-2-1/2	MIL6000 SERIES 2 1/2" ID OIL AND COOLANT HOS
MIL-DTL-6000D-2-1/4	MIL6000 SERIES 2 1/4" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-3	MIL6000 SERIES 3" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-3/4	MIL6000 SERIES 3/4" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-3/8	MIL6000 SERIES 3/8" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-5/16	MIL6000 SERIES 5/16" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-5/8	MIL6000 SERIES 5/8" ID OIL AND COOLANT HOSE
MIL-DTL-6000D-7/8	MIL6000 SERIES 7/8" ID OIL AND COOLANT HOSE
ACP-C-MIL-DTL6000 – Tailor made	ACP-C-MIL-DTL6000 – Tailor made